


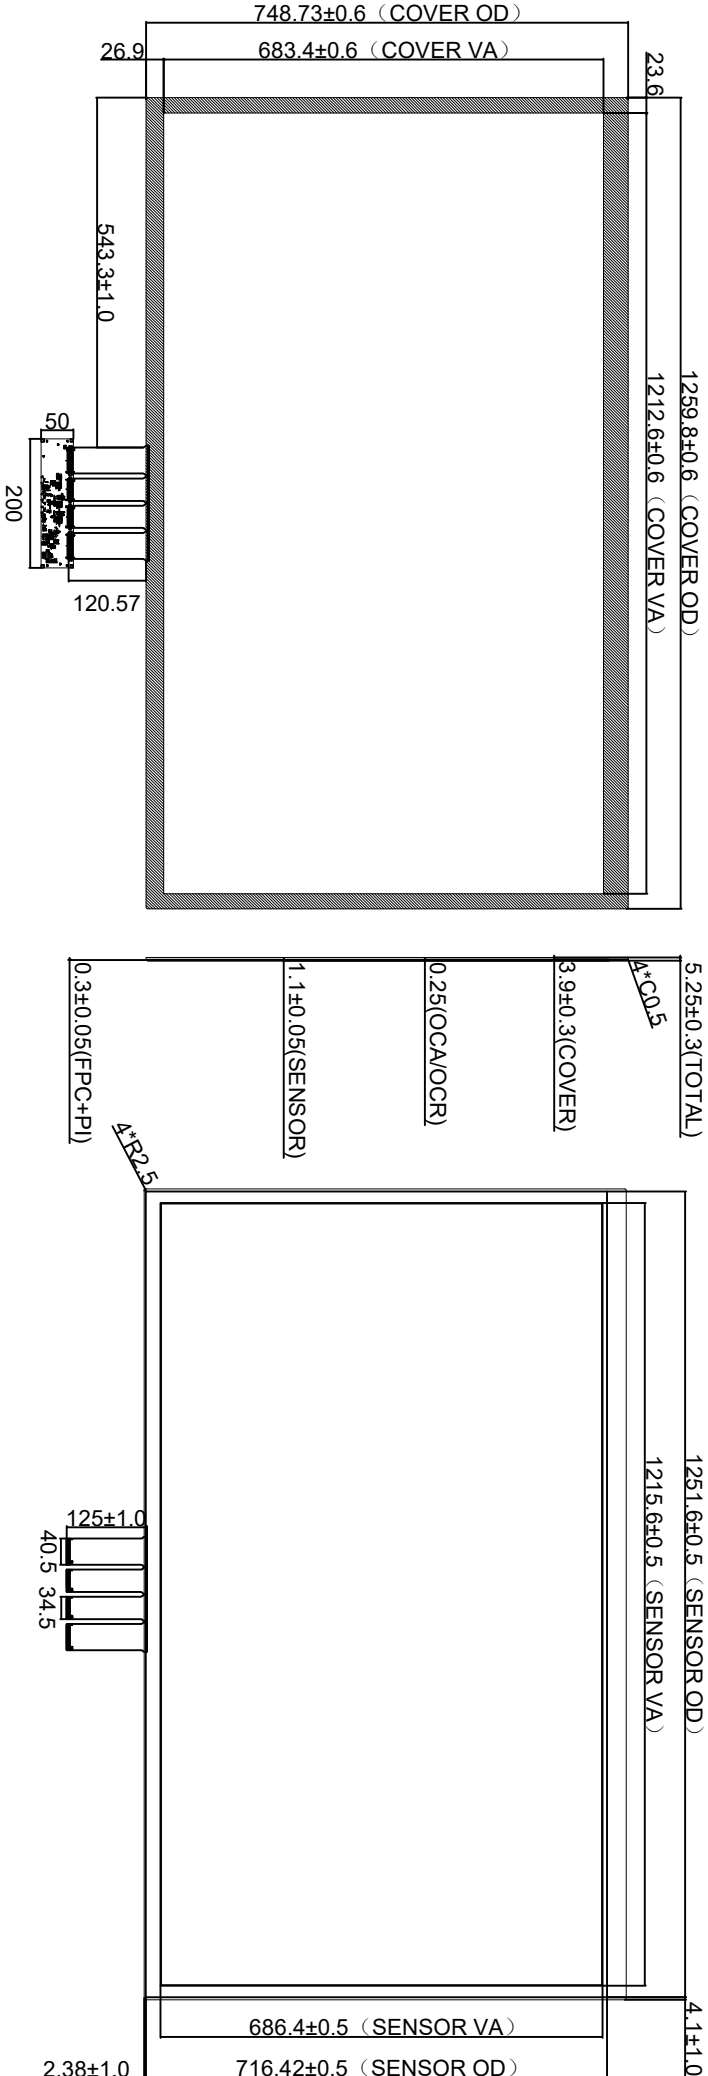

Screen printing area: Print Black

Front view

Side view

Back view

Technical parameters									
1. Interfaces:	USB	7. Humidity range:	45~85%RH			USB Connector (J1)		USB Connector (J1)	
2. Structure :	G+G	8. Transmittance:	≥85%			1	VBUS(5V)	1	VBUS(5V)
3. IC solutions:	ILI2325	9. Surface hardness:	≥6H			2	USB_D-	2	SDA
4. Impact resistance:	35.0Φ01A, Steel Ball1/225g/ Height=35cm/11mm	10. Operate :	-20℃~+70℃, ≤85%RH			3	USB_D+	3	SCK
5. Touch points:	10 points	11. Storage :	-30℃~+80℃, ≤85%RH			4	NC	4	INT
6. Power supply:	5V	12. Unmarked dimension tolerance	as±0.5			5	GND	5	GND

		杭州宏梟科技有限公司 GraHowlet Technology CO., Ltd							
Model	HX5501801		view direction		Unit	MM			
Version	VL.0	Designer	LU0	Date	2018-07-05	Edition	A1		
Customer		Approved	Vito	Date	2018-07-05	Proportion	1:1		